


ALUMINIUM HOLE GRID VACUUM CHUCK -PRO

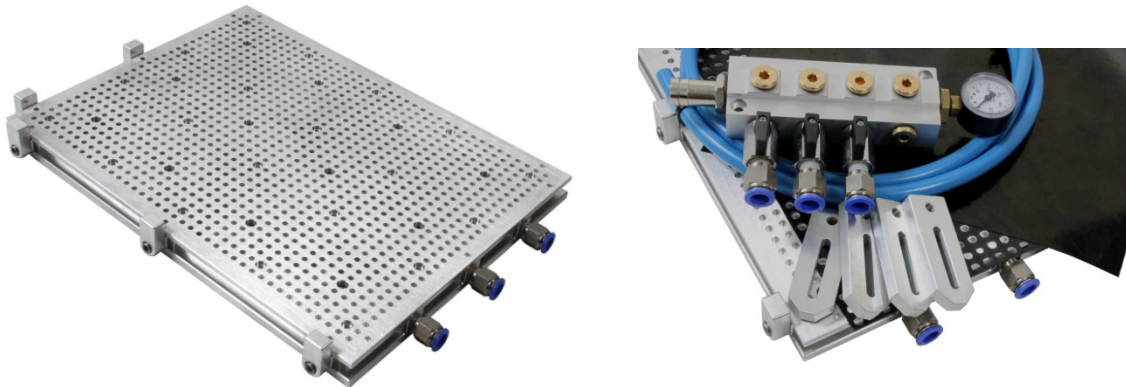

Dimensions (mm)						
Part Number	Length	Width	Height	Nbr suction zones	threaded bushing nxM	Weight kg
5001/06/215X135	216	136	26	1	2xM6	4
5001/06/315X215	316	216	26	2	4xM6	9
5001/06/315X315	316	316	27	3	9xM8	10
5001/06/415X315	416	316	27	3	12xM6	12
5001/06/415x415	416	416	27	4	16xM8	15
5001/06/515X215	516	216	27	2	10xM10	13
5001/06/515X315	516	316	27	3	18xM8	16
5001/06/515X415	516	416	27	4	20xM8	18
5001/06/615X415	616	416	27	4	24xM8	20
5001/06/716x316	716	316	27	3	21xM8	19
5001/06/615X515	616	516	27	5	30xM8	27
5001/06/715X515	716	516	27	5	35xM8	30
5001/06/1015X515	1016	516	27	5	50xM8	50
5001/06/1015X615	1016	616	27	6	60xM8	55

Other dimensions on request.

Use :

Milling of workpieces with possible through-milling operations thanks to the perforated rubber mat.

Feature :

- Pure cast aluminium
- Trimming spare : 4 mm
- Drillings : 0.3 mm / pitch 10 x 10 mm
- M6 Thread grid 100 x 100 mm
- Parallélism : +/- 0.01/100 mm
- Retractable stop collars on two sides.
- Surrounding clamping base.
- Supplied with vacuum distributor, 1 perforated rubber mat, 1 PVC cover mat, clamps.
- Option : High precision perforated rubber mat (Thick 1 mm +/- 0.01mm)